

Single Element Ultrasound Imaging with Compressed Sensing


William Meng

wlmeng@stanford.edu

EE 367 Final Project, Winter 2021


Motivation

- Conventionally, a single ultrasound transducer can only capture 1D depth data, unless it is mechanically scanned.
- A *coded aperture* can encode lateral information into a single temporal signal to perform 2D or 3D imaging [1, 2, 3].

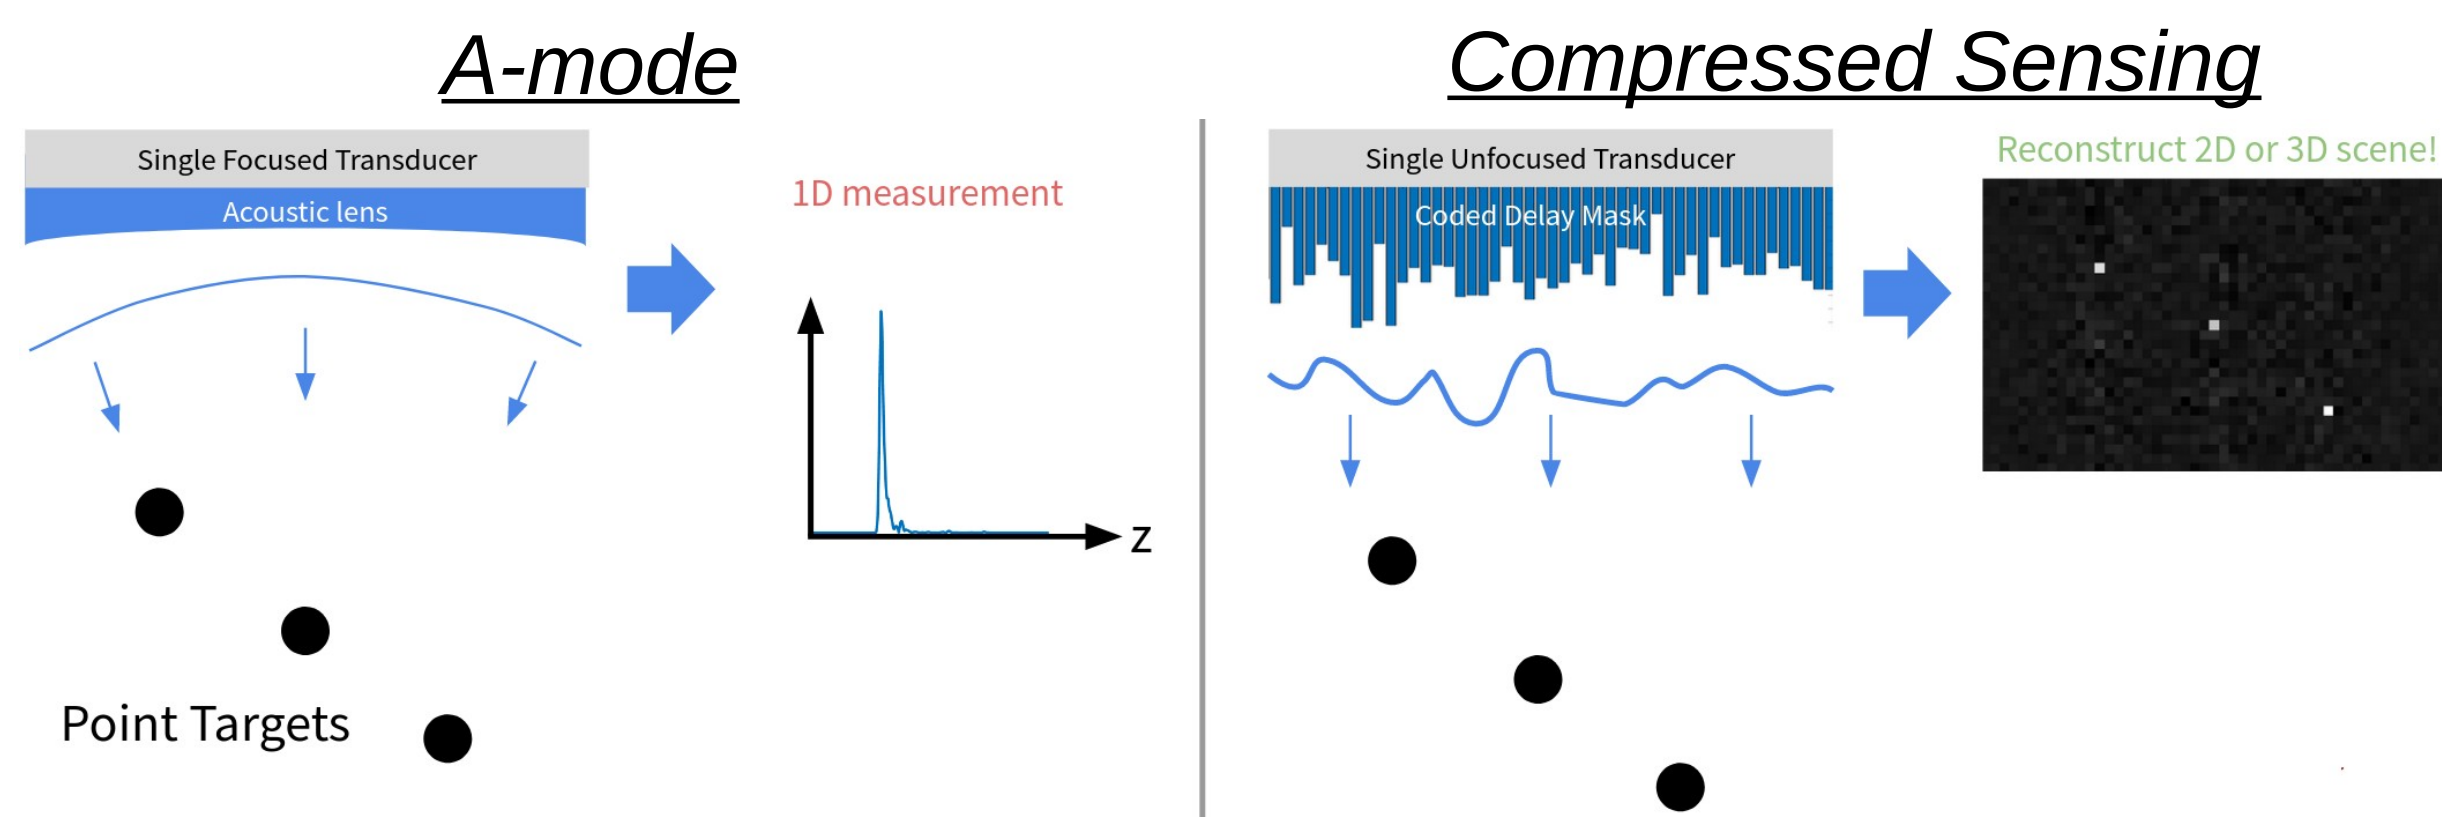

Methodology

- Approximate physical mask as a *delay profile* (ignore reflection/refraction/diffraction).
- Linear image formation model based on temporal *pulse-echo response* at each pixel.
- Multiple mask *rotations* provide additional diverse measurements of spatial information.
- Reconstruct image with Least Norm (PCG or Pseudoinverse) or ADMM.

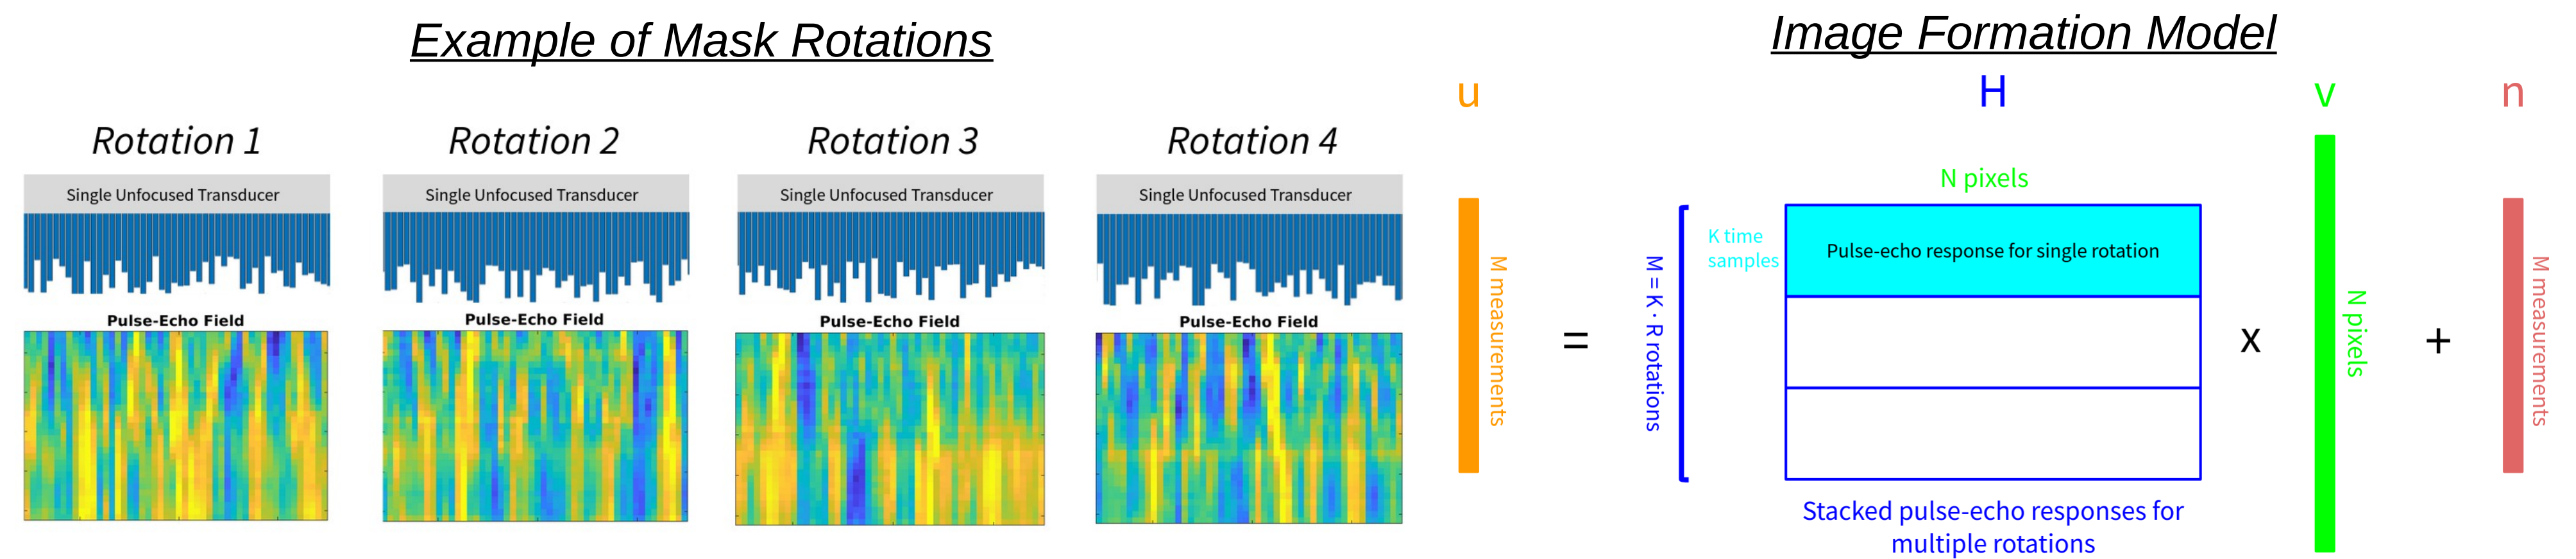

Related Work

- 2D/3D ultrasound imaging is typically done with *ultrasound arrays* consisting of many elements, but this requires greater hardware complexity and cost.
- Other coded aperture techniques for ultrasound imaging use a 3D printed delay mask [1], Hadamard-encoded amplitude mask [2], or a scattering layer [3].

Simulated Results

- Generated synthetic data with 90 dB electronic SNR based on a scene with 3 point targets.
- Reconstructed with Least Norm (PCG) for: (a) No mask (b) R=1 (c) R=4.
- Characterized degradation of Least Norm (PCG) image reconstruction vs electronic SNR for R=4.
- See paper and presentation for additional results.

Varying R

Ground Truth	(a) Reconstructed (No Mask)	(b) Reconstructed (Mask with 1 rotation)	(c) Reconstructed (Mask with 4 rotations)
PSNR:	12.67 dB	8.78 dB	19.99 dB
Artifacts:	Double targets	Background noise	Minimal

Varying Electronic SNR

Elec. SNR = 60 dB	Elec. SNR = 30 dB	Elec. SNR = 20dB
19.93 dB	17.39 dB	14.16 dB

Reconstructed image noise increases with electronic noise.

References

- [1] P. Kruijinga, et al, "Compressive 3D ultrasound imaging using a single sensor", Science Advances, Vol. 3, No. 12, December 2017.
- [2] E. Hahamovich, A. Rosenthal, "Ultrasound Detection Arrays Via Coded Hadamard Apertures", IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, Vol. 67, Issue 10, Oct. 2020.
- [3] X. Luis Deán-Ben, et al, "Acoustic Scattering Mediated Single Detector Optoacoustic Tomography", Physical Review Letters, Vol. 123, Iss. 17, 25 October 2019.